


Bi-Cellular Backer Rod

(US Patent #5,387,050)

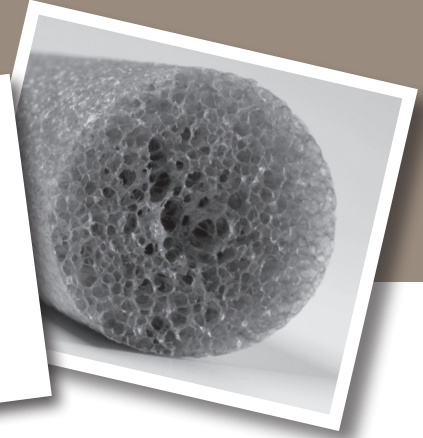

Product Name: SOF® Rod

Patented, round, flexible, polyolefin foam rod made of a non-absorbing outer skin and a resilient interior network of both open and closed cells that does not out-gas when ruptured.

Features

- Easy to apply
- Non-gassing
- Non-exuding
- Chemically inert
- Virtually dust-free
- Non-absorbing
- Meets all of the requirements of the 1990 Clean Air Act
- Is a "Domestic End Product" as defined in the Buy American Act, Title 41 USC 10

Physical Property Requirements		
Property	Value	ASTM Test Methods
Density lb/ft ³ (kg/m ³), avg.	1.8-2.5 (28-40)	D 1622
Outgassing (No. of Bubbles)	< 1	C 1253
Compression Recovery, %, min	> 90	D 5249
Compression Deflection ¹ psi (kg/cm ²)	5 (.35)	D 5249
Tensile Strength psi (kgf/cm ²), min	38 (2.67)	D 1623
Water Absorption (g/cc)	< .03	C 1016 - Procedure B

¹ Using 25% compression.

Description

Type: B - Per ASTM C 1330. Cylindrical, flexible sealant backings composed of bi-cellular material. Also Reference ASTM C 717 for use as gasket or sealing material.
FORM: Round Foam Rod.
TEMPERATURE LIMITS: -45°F to +160°F.

Benefits

Backer rod limits the depth of the sealant and prevents excessive sealant use. It also helps sealant assume optimum shape factor to prolong sealant service life and acts as a barrier to the flow of sealant through the joint.

Applications

Common applications include, but are not limited to, expansion and contraction joints, window glazing, curtain wall construction partitions, parking decks, bridge construction, modular home gasketing, and log home chinking.

Bi-Cellular Backer Rod

Product Name: SOF® Rod (US Patent #5,387,050)

Packaging Specs						
Dimension		Unit	Length / Unit		Unit Weight	Unit Dimension
3/8"	10 mm	Spool	3600'	1097 m	12 lbs. 5.4 kg.	18" x 18" x 31"
		Handy Pack	1400'	427 m	7 lbs. 3 kg.	15" x 15" x 18"
5/8"	16 mm	Spool	1550'	472 m	12 lbs. 5.4 kg.	18" x 18" x 31"
		Handy Pack	550'	168 m	7 lbs. 3 kg.	15" x 15" x 18"
7/8"	22 mm	Spool	850'	259 m	12 lbs. 5.4 kg.	18" x 18" x 31"
		Handy Pack	330'	101 m	7 lbs. 3 kg.	15" x 15" x 18"
1-1/8"	29 mm	Spool	500'	152 m	12 lbs. 5.4 kg.	18" x 18" x 31"
		Handy Pack	120'	38 m	7 lbs. 3 kg.	15" x 15" x 18"
1-1/2"	38 mm	Cut Length	550'	168 m	18 lbs. 8 kg.	23" x 13" x 75"
2"	51 mm	Cut Length	360'	110 m	18 lbs. 8 kg.	23" x 13" x 75"
2-1/2"	63 mm	Cut Length	240'	73 m	18 lbs. 8 kg.	23" x 13" x 75"
3"	76 mm	Cut Length	144'	44 m	18 lbs. 8 kg.	23" x 13" x 75"
4"	102 mm	Cut Length	90'	27 m	18 lbs. 8 kg.	23" x 13" x 75"

Joint Preparation and Installation


Just prior to placing the backer rod, clean all joints per the sealant manufacturer's recommendations. Thoroughly remove any concrete form-release agents, curing compound residue, laitance, or any foreign materials. To ensure a good sealant bond, joints must be clean and dry when the new sealant is installed. Air compressors used for this purpose must be equipped with traps for removal of oil and moisture. Install the backer rod at the depth recommended by the sealant manufacturer with a blunt tool.

Size Selection - Proper size selection is important as it controls the depth of the sealant bead. It must be oversized (25-50%) to fit tightly into the joint and function as a bond-breaker to prevent back-side adhesion of the sealant.

Compatibility - Bi-cellular polyolefin foam is basically an inert material; and therefore, it is compatible, both physically and chemically, with virtually all known cold applied sealants, including self-leveling types.

Precautions - Do not puncture, over compress or stretch backer rod during insertion. Do not use with hot applied sealants. Tests for outgassing of cold applied sealants shall be made in accordance with ASTM Test Method C 1253. Sealant compatibility should be confirmed by the sealant manufacturer. Compatibility characteristics of sealants in contact with sealant backings can be determined by ASTM Test Method C 1087.

Cut Lengths

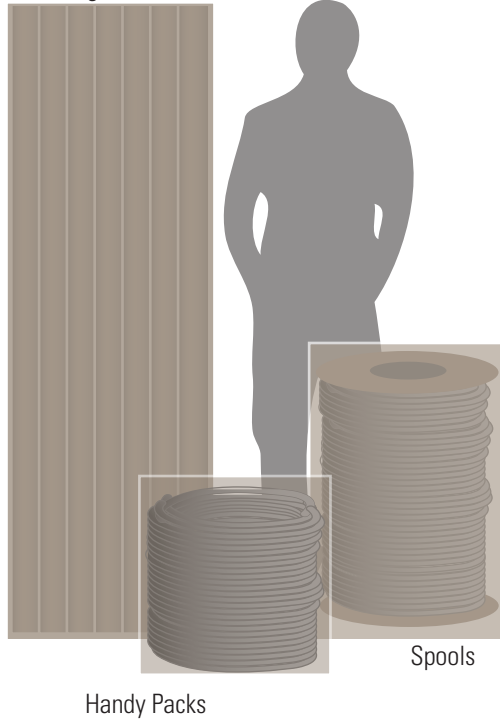

Examples shown are for illustrative purposes only. Actual product may differ, slightly.

Although every effort has been made to assure the accuracy of this information and the safety and suitability of its products, Nomaco Inc. accepts no responsibility for results obtained by the application of this information or for the safety and suitability of its products, either alone or in combination with other products. Users are advised to make their own tests to determine the safety and suitability of each such product or product combination for their own purposes. In view of the various conditions under which this information and our products or the products of other manufacturers in combination with our products may be used, Nomaco sells its products without warranty, and buyers and users assume all responsibility and liability for loss or damage from handling and use of these products, whether used alone or in combination with other products.